




# MianKang Bearing Co., Ltd.

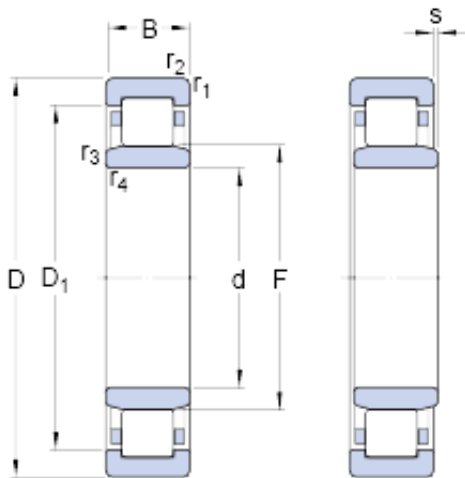

## skf nu 215 ecp bearing

Bearing No. nu 215 ecp

nu 215 ecp Bearing 2D drawings and 3D CAD models

Size	130x75x25 mm
Bore Diameter	130 mm
Outer Diameter	75 mm
Width	25 mm
d	75 mm
D	130 mm
B	25 mm
D <sub>1</sub>	113.3 mm
F	88.5 mm
r <sub>1,2</sub> - min.	1.5 mm
r <sub>3,4</sub> - min.	1.5 mm
s	1.2 mm
d <sub>a</sub> - min.	84 mm
d <sub>a</sub> - max.	86 mm
d <sub>b</sub> - min.	91 mm
D <sub>a</sub> - max.	121.5 mm
r <sub>a</sub> - max.	1.5 mm
r <sub>b</sub> - max.	1.5 mm
Basic dynamic load rating - C	150 kN
Basic static load rating - C <sub>0</sub>	156 kN
Fatigue load limit - P <sub>u</sub>	20.4 kN
Reference speed	5600 r/min
Limiting speed	6000 r/min
Calculation factor - k <sub>r</sub>	0.15
Category	Cylindrical Roller Bearings



## MianKang Bearing Co., Ltd.

Inventory	0.0
Manufacturer Name	SKF
Minimum Buy Quantity	N/A
Weight / Kilogram	1.301
EAN	7316577028594
Product Group	B04144
Bore Profile	Straight
Cage Material	Polymer
Precision Class	RBEC 1   ISO P0
Number of Rows of Rollers	Single Row
Separable	Inner Ring - Both Sides
Rolling Element	Cylindrical Roller Bearing
Profile	Complete with Outer and Inner Ring
Snap Ring	No
Internal Clearance	C0-Medium
Retainer	Yes
Relubricatable	Yes
Inch - Metric	Metric
Other Features	High Capacity   Plain Inner Ring   2 Rib Outer Ring   Cage on Outer Ring ID
Long Description	75MM Bore; Straight Bore Profile; 130MM Outside Diameter; 25MM Width; Polymer Cage Material; RBEC 1   ISO P0; Single Row; Inner Ring - Both Sides Separable; No Snap Ring; Relubricatable; C0-Medium In
Category	Cylindrical Roller Bearing
UNSPSC	31171547
Harmonized Tariff Code	8482.50.00.00
Noun	Bearing
Manufacturer URL	<a href="http://www.skf.com">http://www.skf.com</a>



## MianKang Bearing Co., Ltd.

Manufacturer Item Number	NU 215 ECP
Weight / LBS	2.866
Bore	2.953 Inch   75 Millimeter
Outside Diameter	5.118 Inch   130 Millimeter
Width	0.984 Inch   25 Millimeter
bore diameter:	75 mm
precision rating:	RBEC 1 (ISO Class Normal)
outside diameter:	130 mm
maximum rpm:	6000 RPM
overall width:	25 mm
bearing material:	Steel
flanges:	(2) Outer Ring
cage material:	Polyamide
bore type:	Straight
finish/coating:	Uncoated
number of rows:	1
closure type:	Open
internal clearance:	C0
application:	Piston Type Machines, Rolling Mills, Spindles/Machine Tools
ring separation:	Separable Ring
outer ring width:	25 mm
operating temperature range:	Maximum of +300 ° F
fillet radius:	1.5 mm
dynamic load capacity:	150 kN
series:	NU2
static load capacity:	156 kN
D <sub>1</sub>	113.3 mm
r <sub>1,2</sub> min.	1.5 mm
r <sub>3,4</sub> min.	1.5 mm



## MianKang Bearing Co., Ltd.

s max.	1.2 mm
$d_a$ min.	84 mm
$d_a$ max.	86 mm
$d_b$ min.	91 mm
$D_a$ max.	121.5 mm
$r_a$ max.	1.5 mm
$r_b$ max.	1.5 mm
Basic dynamic load rating C	150 kN
Basic static load rating $C_0$	156 kN
Fatigue load limit $P_u$	20.4 kN
Calculation factor $k_r$	0.15
Limiting value e	0.2
Axial load factor Y	0.6
Mass bearing	1.24 kg
Angle ring	HJ 215 EC